




Shakespeare
Composite Structures™

**COMPOSITE
TUFF-POLE®**

Square
Composite
Light Poles

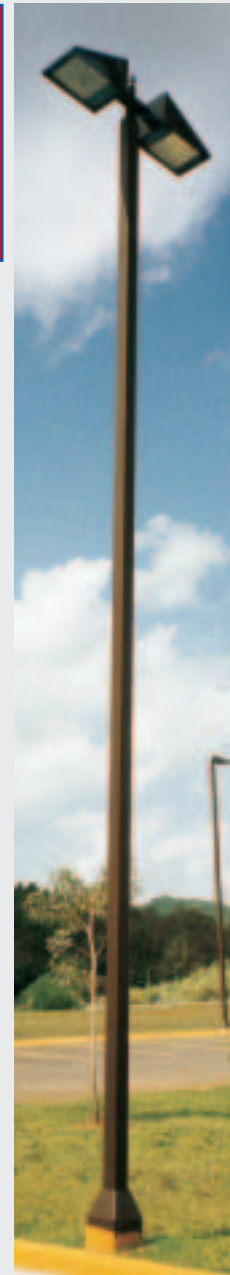

Shakespeare Square Compos

- Contemporary styling

- Light weight

- Exceptional tolerance to environmental extremes

- Fast, easy installation

- Virtually maintenance free

- Electrically non-conductive

- Lasting good look

- Architectural colors available



Standard Duty

4" x 4" Anchor Base, Series AQ

Nominal Mounting Height (ft.)	Pole Weight (lbs.)	80 MPH Total EPA (sq. ft.)	90 MPH Total EPA (sq. ft.)	100 MPH Total EPA (sq. ft.)	Bolt Hole Circle (in.)	CATALOG NUMBER
6	18	20.0	20.0	20.0	8	AQ06-00S5BB01
8	23	20.0	20.0	20.0	8	AQ08-00S5BB01
10	27	20.0	20.0	16.1	8	AQ10-00S5BB01
12	31	20.0	16.4	12.8	8	AQ12-00S5BB01
14	35	14.2	10.7	8.2	8	AQ14-00S5BB01
15	37	13.0	9.7	7.3	8	AQ15-00S5BB01
16	39	11.9	8.8	6.5	8	AQ16-00S5BB01
18	43	9.9	7.2	5.2	8	AQ18-00S5BB01
20	47	8.3	5.8	4.0	8	AQ20-00S5BB01
25	57	5.0	3.0	1.5	8	AQ25-00S5BB01

Allowable top load weight including fixtures and mounting hardware: 150 lbs.

Anchor bolts #OPAB-1025, 5/8" x 21" x 3" (4 per set) included.

Standard fixture attachment: Capped. For 2 3/8" O.D. tenon, change 00 to 02 in catalog number; for 3" O.D. tenon, change 00 to 01 in catalog number; for direct arm attachment, change 00 to 99 in catalog number and supply mounting template.

Standard color: Dark Bronze. For Black, change S5 to S1 in catalog number. Architectural colors available. For further information contact Shakespeare Composite Structures™.

Optional Base Cover: OPSH-AQ-5 (Dark Bronze color); OPSH-AQ-1 (Black).

4" x 4" Direct Burial Base, Series BQ

Nominal Mounting Height (ft.)	Pole Weight (lbs.)	80 MPH Total EPA (sq. ft.)	90 MPH Total EPA (sq. ft.)	100 MPH Total EPA (sq. ft.)	Suggested Burial Depth (ft.)	CATALOG NUMBER
6	17	20.0	20.0	20.0	2	BQ08-00S5AA01
8	22	20.0	20.0	20.0	2	BQ10-00S5AA01
10	28	20.0	20.0	16.1	3	BQ13-00S5BC43
12	32	20.0	16.4	12.8	3	BQ15-00S5BC43
14	37	14.2	10.7	8.2	4	BQ18-00S5BE13
15	40	13.0	9.7	7.3	4	BQ19-00S5BE13
16	43	11.9	8.8	6.5	4	BQ20-00S5BE13
18	49	9.9	7.2	5.2	4	BQ22-00S5BE13
20	55	8.3	5.8	4.0	5	BQ25-00S5BG25
25	70	5.0	3.0	1.5	5	BQ30-00S5BG25

Allowable top load weight including fixtures and mounting hardware: 150 lbs.

Standard fixture attachment: Capped. For 2 3/8" O.D. tenon, change 00 to 02 in catalog number; for 3" O.D. tenon, change 00 to 01 in catalog number; for direct arm attachment, change 00 to 99 in catalog number and supply mounting template.

Standard color: Dark Bronze. For Black, change S5 to S1 in catalog number. Architectural colors available. For further information contact Shakespeare Composite Structures™.

Optional Base Cover: OPSH-AQ-5 (Dark Bronze color); OPSH-AQ-1 (Black).

Medium Duty

5" x 5" Anchor Base, Series SSA

Nominal Mounting Height (ft.)	Pole Weight (lbs.)	80 MPH Total EPA (sq. ft.)	90 MPH Total EPA (sq. ft.)	100 MPH Total EPA (sq. ft.)	Bolt Hole Circle (in.)	CATALOG NUMBER
10	55	40.0	32.0	25.0	10-12	SSA5-10
15	77	15.0	12.0	9.5	10-12	SSA5-15
20	106	12.2	9.1	6.9	10-12	SSA5-20
25	129	8.7	6.2	4.4	10-12	SSA5-25
30	158	4.7	2.8	1.4	10-12	SSA5-30

Allowable top load weight including fixtures and mounting hardware: 300 lbs.

Anchor bolts #OPAB-2035, 1" x 30" x 4" (4 per set) included.

Standard fixture attachment: Capped. For 2³/₈" O.D. tenon, add 02 to catalog number; for 3" O.D. tenon, add 01 to catalog number; for direct arm attachment, add 99 to catalog number and supply mounting template.

Standard color: Dark Bronze. For Black, change SSA5 to SSA1 in catalog number. Architectural colors are available. For further information contact Shakespeare Composite Structures™.

Optional Split Base Cover (2-piece), order OPSH-AR-5 (Dark Bronze color); OPSH-AR-1 (Black).



Heavy Duty

5" x 5" Anchor Base, Series AR

Nominal Mounting Height (ft.)	Pole Weight (lbs.)	80 MPH Total EPA (sq. ft.)	90 MPH Total EPA (sq. ft.)	100 MPH Total EPA (sq. ft.)	Bolt Hole Circle (in.)	CATALOG NUMBER
10	61	61.5	48.0	38.4	10-12	AR10-00S5BB01
15	78	31.0	21.0	18.0	10-12	AR15-00S5BB01
20	113	22.3	16.7	12.6	10-12	AR20-00S5BB01
25	138	15.9	11.4	8.1	10-12	AR25-00S5BB01
30	164	8.6	5.1	2.6	10-12	AR30-00S5BB01

Allowable top load weight including fixtures and mounting hardware: 300 lbs.

Anchor bolts #OPAB-2035, 1" x 30" x 4" (4 per set) included.

Standard fixture attachment: Capped. For 2³/₈" O.D. tenon, change 00 to 02 in catalog number; for 3" O.D. tenon, change 00 to 01 in catalog number; for direct arm attachment, change 00 to 99 in catalog number and supply mounting template.

Standard color: Dark Bronze. For Black, change S5 to S1 in catalog number. Architectural colors are available. For further information contact Shakespeare Composite Structures™.

Optional Split Base Cover (2-piece), order OPSH-AR-5 (Dark Bronze color); OPSH-AR-S-1 (Black).



5" x 5" Direct Burial Base, Series SSB

Nominal Mounting Height (ft.)	Pole Weight (lbs.)	80 MPH Total EPA (sq. ft.)	90 MPH Total EPA (sq. ft.)	100 MPH Total EPA (sq. ft.)	Suggested Burial Depth (ft.)	CATALOG NUMBER
10	61	40.0	32.0	25.0	3	SSB5-13
15	83	15.0	12.0	9.5	4	SSB5-19
20	116	12.2	9.1	6.9	5	SSB5-25
25	141	8.7	6.2	4.4	5	SSB5-30
30	173	4.7	2.8	1.4	5	SSB5-35

Allowable top load weight including fixtures and mounting hardware: 300 lbs.

Standard fixture attachment: Capped. For 2³/₈" O.D. tenon, add 02 to catalog number; for 3" O.D. tenon, add 01 to catalog number; for direct arm attachment, add 99 to catalog number and supply mounting template.

Standard color: Dark Bronze. For Black, change SSB5 to SSB1 in catalog number. Architectural colors are available. For further information contact Shakespeare Composite Structures™.

Optional Split Base Cover (2-piece), order OPSH-AR-5 (Dark Bronze color); OPSH-AR-1 (Black).



5" x 5" Direct Burial Base, Series BR


Nominal Mounting Height (ft.)	Pole Weight (lbs.)	80 MPH Total EPA (sq. ft.)	90 MPH Total EPA (sq. ft.)	100 MPH Total EPA (sq. ft.)	Suggested Burial Depth (ft.)	CATALOG NUMBER
10	67	61.5	48.0	38.4	3	BR13-00S5BC43
15	97	31.0	21.0	18.0	4	BR19-00S5BE13
20	127	22.3	16.7	12.6	5	BR25-00S5BG25
25	154	15.9	11.4	8.1	5	BR30-00S5BG25
30	180	8.6	5.1	2.6	5	BR35-00S5BG25

Allowable top load weight including fixtures and mounting hardware: 300 lbs.

Standard fixture attachment: Capped. For 2³/₈" O.D. tenon, change 00 to 02 in catalog number; for 3" O.D. tenon, change 00 to 01 in catalog number; for direct arm attachment, change 00 to 09 in catalog number and supply mounting template.

Standard color: Dark Bronze. For Black, change S5 to S1 in catalog number. Architectural colors are available. For further information contact Shakespeare Composite Structures™.

Optional Split Base Cover (2-piece), order OPSH-AR-5 (Dark Bronze color); OPSH-AR-1 (Black).

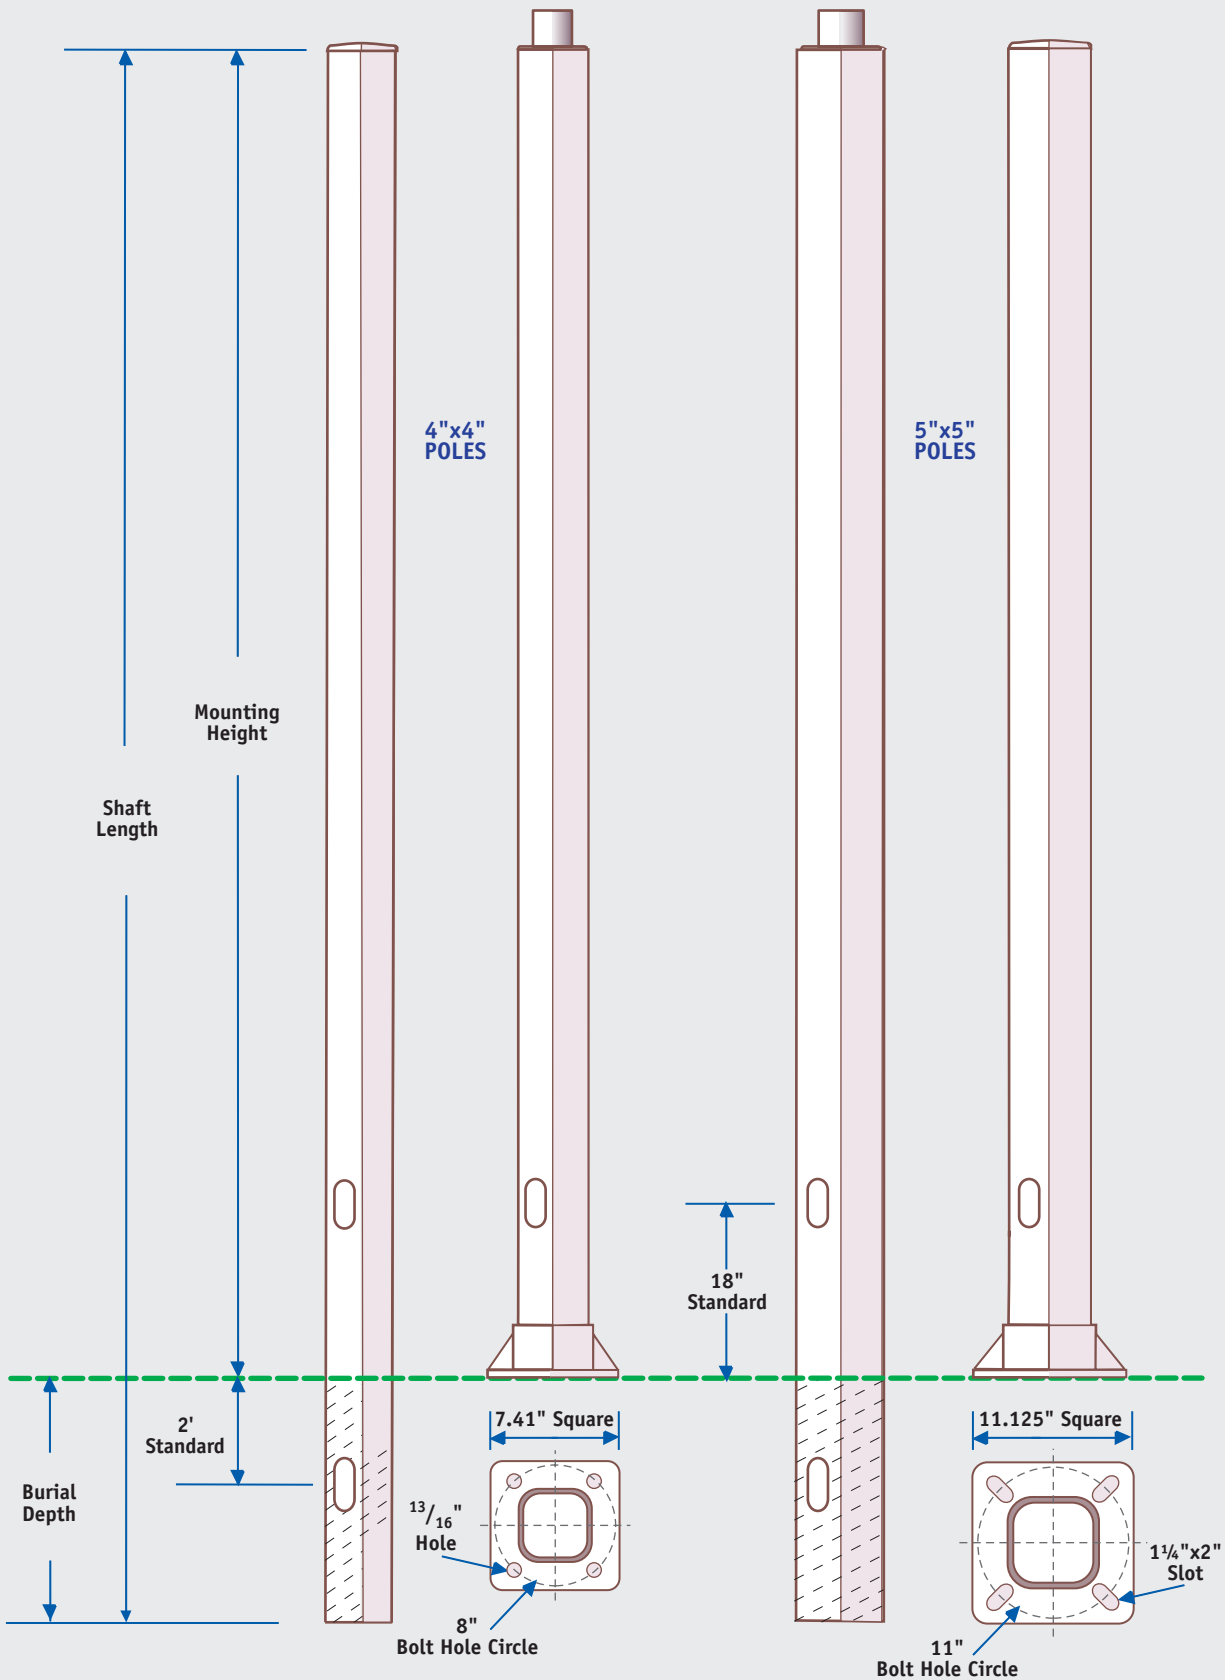

19845 Highway 76 · Newberry, South Carolina 29108 · www.skp-cs.com · 800.800.9008 · 803.276.5504 · F/803.276.8940

A DIVISION OF GENLYTE THOMAS GROUP, LLC